



Digital Multifunctional System



## **Co**mpact Style for a Productive Workplace

Seeking a versatile B&W document solution that won't take up too much space? Consider the MX-B450F/B350F. Thanks to its small footprint\* of 428 × 507 mm, it fits easily on a desk or under a counter—just where you need it. The MX-B450F/B350F offers all the benefits of 4-in-1 functionality in one user-friendly package. Its solid all-round productivity helps to streamline your workflow and keep your enterprise running on track.

\* "Footprint" refers to the part directly adjacent to the floor or desk space. The numerical value is for the MFP's base unit only.



## USABILITY

## **Direct Printing/Scanning with USB Drives**

Insert a USB drive into the MFP and a command screen automatically pops up on the LCD. Right away you can print files from the USB drive or scan documents directly to the USB drive.



## **Device Management**

Sharp Remote Device Manager\* (SRDM) gives administrators centralised control of their networked MFPs and printers. This software covers system setup, security settings, troubleshooting, and more.

\* Contact a Sharp customer representative for availability and other details.

SHARP							
Sharp Remo	te Device Manager						
Login Account Nam	ne : admin	n				O Set	ings • Help • Logo
Top Group +							
							210
ж _ Group_A • ж _ Group_B •	🔥 2 🕥 2 🛕 2	•	: ف ف • •		at o at o	94 0 M 0	1
	Registered Devices Device Log		Coup Information Device Discovery		ait on Log		
	🔥 2 🕥 2 🛕 2						Al Devices
	Registered Devices Device Log						Al Devices Device Operation
	Registered Devices Device Log	Sub Group List	Group Information Device Discovery	Report Opera	ation Log	Filter	
	Registered Devices Device Log	Sub Group List Device Status	Group Information Device Discovery Model Name	Report Opera	Location	Filter	Device Operation

Sharp Remote Device Manager

## **Reliable Security**

- User authentication prevents unauthorised use of the MFP. Up to 30 users can register a unique access number
- Retained data can be erased when it's time to replace the MFP, to prevent confidential information from leaking

## Sharpdesk Mobile\*

Sharpdesk Mobile is a mobile print/scan application. With Sharpdesk Mobile, users can import documents scanned on the MFP to their mobile devices for previewing and saving. And files on a mobile device can be printed out on the MFP, sent as e-mail attachments, or used in other applications.



\* Availability varies by country/region. For details, see the Sharpdesk Mobile support website: http://sharp-world.com/products/copier/docu\_solutions/mobile/sharpdesk\_mobile/

## Easy-to-Use Control Panel

The MFP has a user-friendly control panel. Next to it are two LED lamps: one red, one green. These light up to notify you—even from a distance—of the status of the machine.



## **COPY/PRINT**

## **Efficient Output**

This MFP delivers a fast output of 45/35 ppm\*. The first copy comes out in 8.5/9.0 seconds, saving you valuable time when performing multiple short-run jobs. The MFP's warm-up time of 29

seconds brings added efficiency and reduces overall energy consumption.

\* A4 (8 1/2" x 11"), short-edge feeding



## Ample Paper Capacity

A 500-sheet tray and 50-sheet multi bypass tray come standard. An optional 600-sheet paper feed unit is available for a total paper capacity of 1,150 sheets.



## **Accommodates Various Paper Sizes**

A wide variety of paper sizes, including A6, are accommodated by the standard tray, as well as by the multi bypass tray. The optional paper feed unit and multi bypass tray handle legal-size paper and paper up to 220 g/m<sup>2</sup> thick.



## **ID Card Copy**

The MFP has a dedicated key for easy copying of both sides of a card (ID cards, credit cards, etc.) onto a single page.



## PCL 6 and PostScript<sup>®</sup> 3<sup>™</sup>

For enhanced font compatibility and improved graphics handling, the MFP supports both PCL 6 and PostScript 3.

## **Network Interface**

Fast, powerful networking capability is provided via the 1000Base-T gigabit Ethernet standard.

## **Automatic Document Feeder**

A standard-equipped 50-sheet RSPF (reversing single pass feeder) scans at 40 opm\* (one-sided) and enables efficient duplex copying of paper sizes ranging from A4 to A6.

\* Originals per minute; when feeding A4 (8  $^{1}/_{2}$ " × 11") sheets

# SCAN/FAX


### **Full-Colour Network Scanning**

This MFP works as a full-colour network scanner and supports TIFF, PDF, and JPEG file formats. Converting any type of paper-based document into an editable digital file is as easy as making a copy.



## **Multiple Scan Destinations**

You can choose different ways to distribute your scanned documents: for example, send as an e-mail attachment or scan directly to an FTP server for storage.



## Scanner Program Keys

Scanner Program Keys on the control panel enable users to register frequently used scan settings and destinations for easy, one-touch recall.

## **Business Card Scanning**

The MFP easily scans batches of up to 25 business cards\* with its RSPF and can be used with commercially available business card scan software to create business card databases. \* One-sided scanning



## Sharpdesk

With Sharpdesk integrated document management software, scanned files can be organised, edited, converted, and combined with ease. What's more, Full Text Search makes it easy to retrieve your documents.

## **Versatile Fax Functions**

- Super G3 Fax function
- PC-Fax lets you send documents created on a PC directly to a recipient's fax machine via a phone line without printing to paper
- Fax destination confirmation allows users to reconfirm fax numbers before sending to prevent transmission errors
- Inbound routing lets you forward received faxes via the network to a shared folder or e-mail address without printing to paper
- Speed dial keys register up to 300 numbers

### **SPECIFICATIONS** (tentative)

Generat	
Туре	Desktop
Engine speed	A4 (8 1/2" x 11")*1: Max. 45/35 ppm
Control panel display	5-line LCD
Paper size	Max. A4 (8 <sup>1</sup> / <sub>2</sub> " x 14"), min. A6 (5 <sup>1</sup> / <sub>2</sub> " x 8 <sup>1</sup> / <sub>2</sub> ")
Paper capacity	Standard: 550 sheets
(80 g/m <sup>2</sup> )	(500-sheet tray and 50-sheet multi bypass tray)
	Maximum: 1,150 sheets
	(550 sheets & optional 600-sheet tray)
Paper weight	Tray 1: 60 g/m <sup>2</sup> to 105 g/m <sup>2</sup> (16 lbs bond to 28 lbs bond)
	Tray 2 (MX-CS14): 55 g/m <sup>2</sup> to 220 g/m <sup>2</sup>
	(13 lbs bond to 80 lbs cover)
	Multi bypass tray: 55 g/m² to 220 g/m²
	(13 lbs bond to 80 lbs cover)
Warm-up time* <sup>2</sup>	29 sec.
Memory	1 GB (copy/print shared)
Power requirements	Rated local AC voltage ±10%, 50/60 Hz
Power consumption	Max. 1.84 kW (220 V to 240 V)
Dimensions (W x D x H)*3	492 x 517 x 560 mm (19 <sup>3</sup> /8" x 20 <sup>23</sup> / <sub>64</sub> " x 22 <sup>1</sup> / <sub>16</sub> ")
Weight (approx.)	29 kg (64.0 lbs)

#### Copier

General

Original paper size	Max. A4 (8 <sup>1</sup> / <sub>2</sub> " x 14")
First copy time* <sup>4</sup>	8.5/9.0 sec.
Continuous copy	Max. 999 copies
Resolution	Scan: 600 x 600 dpi, 600 x 300 dpi
Resolution	Print: 600 x 600 dpi
Gradation	Equivalent to 256 levels
Zoom range	25% to 400% (25% to 200% using RSPF) in 1% increments
Preset copy ratios	Metric: 8 ratios (4R/4E), inch: 5 ratios (3R/2E)

### **Network Colour Scanner**

SYSTEM CONFIGURATION

Scan method	Push scan (via control panel)
	Pull scan (TWAIN-compliant application)
Scan speed <sup>∗5</sup>	Colour: Max. 13 originals/min.
	B/W: Max. 40 originals/min.
Resolution	Push scan: 100, 150, 200, 300, 400, 600 dpi
	Pull scan: 75, 100, 150, 200, 300, 400, 600 dpi
	50 dpi to 9,600 dpi via user setting*6
File formats	TIFF, PDF, JPEG*7
Scanner utility	Sharpdesk
Scan destinations	Scan to e-mail/desktop/FTP server/network folder (SMB)/
	USB drive

#### **Network Printer**

Resolution Interface Supported OS	600 x 600 dpi USB 2.0 (host, high-speed), 10Base-T/100Base-TX/1000Base-T Windows Server® 2008, Windows Server® 2008 R2, Windows Server® 2012, Windows Server® 2012 R2, Windows Server® 2016, Windows® 7, Windows® 8.1, Windows® 10, Mac OS 10.6, 10.7, 10.8, 10.9, 10.10, 10.11, 10.12, 10.13
Network protocols	TCP/IP
Printing protocols	LPR, Raw TCP (port 9100), FTP for downloading print files, IPP, WSD
PDL Available fonts	PCL 6 emulation, PostScript® 3™ emulation 80 fonts for PCL, 136 fonts for PostScript 3 emulation

## Facsimile


**Compression method Communication protocol** Transmission time Modem speed Transmission resolution


**Recording size** Memory Greyscale levels

MH/MR/MMR/JBIG Super G3/G3 Less than 3 seconds\*8 33,600 bps to 2,400 bps with automatic fallback From Standard (203.2 x 97.8 dpi) to Super Fine (203.2 x 391 dpi) A4 to A5 (8 1/2" x 14" to 5 1/2" x 8 1/2") 64 MB (built-in) Equivalent to 256 levels

#### \*1: Short-edge feeding.

- \*2: In a standard measurement environment. May vary depending on operating conditions and environment.
- \*3: Including adjusters and protuberances
- 4: Short-edge feeding of A4 (8 1/a\* x11") sheets from 1st paper tray, using document glass, MFP in fully ready condition. May vary depending on operating conditions and environment.
- \*5: Scan speed will vary depending on the type of document, the scan settings, operating conditions, and environment. Based on Sharp's A4 standard chart, using document feeder, short-edge feeding, one-sided scanning, and factory default settings. \*6: Resolution will vary depending on the size of the scanned area.
- \*7: Colour/greyscale only \*8: Based on Sharp's standard chart with approx. 700 characters (A4 or 8 1/2" x 11" short-edge feeding) at standard resolution in Super G3 mode, 33,600 bps, JBIG compression.
- Design and specifications are subject to change without prior notice.
- PCL is a registered trademark of Hewlett-Packard Company. PostScript 3 is either a registered trademark or trademark of Adobe Systems Incorporated in the US and/or other countries. Windows Server and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Mac is a trademark of Apple Inc., registered in the US and other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners.

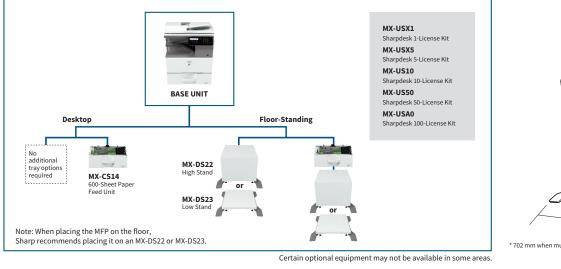



\* 702 mm when multi bypass tray is extended. MX-B450F shown with optional equipment.

Distributed by:

